


| Modelo | Altura de la descarga al piso | | 1.1 | Ángulo de cono | 45 | Diámetro de la descarga |
|--------|-------------------------------|-------------------|------------------------|-------------------------|-------------------|-------------------------|
| | m | | | ° | | m |
| | Diámetro (A) | Altura faldón (B) | Altura pared recta (C) | Altura total a tapa (D) | Capacidad nominal | N° de rolos |
| | m | | | | m ³ | |
| 240 | 2.3 | 2.1 | 5.52 | 7.6 | 24.5 | 5 |
| 300 | 2.3 | 2.1 | 7.05 | 9.1 | 30.9 | 6 |
| 370 | 2.3 | 2.1 | 8.57 | 10.7 | 37.2 | 7 |
| 470 | 2.9 | 2.40 | 6.75 | 9.1 | 47.8 | 6 |
| 570 | 2.9 | 2.40 | 8.27 | 10.7 | 57.8 | 7 |
| 670 | 2.9 | 2.40 | 9.79 | 12.2 | 67.9 | 8 |
| 770 | 2.9 | 2.40 | 11.32 | 13.7 | 77.9 | 9 |
| 810 | 3.45 | 2.67 | 8.00 | 10.7 | 80.1 | 7 |
| 940 | 3.45 | 2.67 | 9.52 | 12.2 | 94.4 | 8 |
| 1080 | 3.45 | 2.67 | 11.04 | 13.7 | 108.6 | 9 |
| 1220 | 3.45 | 2.67 | 12.57 | 15.2 | 122.9 | 10 |
| 1040 | 3.65 | 2.77 | 9.42 | 12.2 | 104.9 | 8 |
| 1200 | 3.65 | 2.77 | 10.94 | 13.7 | 120.9 | 9 |
| 1360 | 3.65 | 2.77 | 12.47 | 15.2 | 136.8 | 10 |
| 1520 | 3.65 | 2.77 | 13.99 | 16.8 | 152.8 | 11 |
| 1550 | 3.9 | 2.90 | 12.34 | 15.2 | 155.2 | 10 |
| 1730 | 3.9 | 2.90 | 13.87 | 16.8 | 173.4 | 11 |
| 1910 | 3.9 | 2.90 | 15.39 | 18.3 | 191.6 | 12 |
| 2090 | 3.9 | 2.90 | 16.91 | 19.8 | 209.8 | 13 |
| 2270 | 4.27 | 3.08 | 15.21 | 18.3 | 227.9 | 12 |
| 2490 | 4.27 | 3.08 | 16.73 | 19.8 | 249.8 | 13 |
| 2710 | 4.27 | 3.08 | 18.25 | 21.3 | 271.6 | 14 |
| 2840 | 4.57 | 3.23 | 16.58 | 19.8 | 284.4 | 13 |
| 3090 | 4.57 | 3.23 | 18.10 | 21.3 | 309.4 | 14 |
| 3340 | 4.57 | 3.23 | 19.63 | 22.9 | 334.4 | 15 |



| Modelo | Altura de la descarga al piso | | 1.1 | Ángulo de cono | 45 | Diámetro de la descarga m 0.3048 |
|--------|-------------------------------|-------------------|------------------------|-------------------------|-------------------------------------|--|
| | m | | | ° | | |
| | Diámetro (A) | Altura faldón (B) | Altura pared recta (C) | Altura total a tapa (D) | Capacidad nominal m ³ | N° de rolos |
| | m | | | | | |
| 220 | 2.3 | 2.83 | 4.79 | 7.6 | 22.7 | 5 |
| 280 | 2.3 | 2.83 | 6.32 | 9.1 | 29.0 | 6 |
| 350 | 2.3 | 2.83 | 7.84 | 10.7 | 35.3 | 7 |
| 430 | 2.9 | 3.35 | 5.80 | 9.1 | 43.8 | 6 |
| 530 | 2.9 | 3.35 | 7.32 | 10.7 | 53.9 | 7 |
| 630 | 2.9 | 3.35 | 8.84 | 12.2 | 63.9 | 8 |
| 740 | 2.9 | 3.35 | 10.37 | 13.7 | 74.0 | 9 |
| 730 | 3.45 | 2.67 | 8.00 | 10.7 | 80.1 | 7 |
| 870 | 3.45 | 2.67 | 9.52 | 12.2 | 94.4 | 8 |
| 1010 | 3.45 | 2.67 | 11.04 | 13.7 | 108.6 | 9 |
| 1160 | 3.45 | 2.67 | 12.57 | 15.2 | 122.9 | 10 |
| 960 | 3.65 | 4.00 | 8.19 | 12.2 | 96.8 | 8 |
| 1120 | 3.65 | 4.00 | 9.72 | 13.7 | 112.7 | 9 |
| 1280 | 3.65 | 4.00 | 11.24 | 15.2 | 128.7 | 10 |
| 1440 | 3.65 | 4.00 | 12.77 | 16.8 | 144.6 | 11 |
| 1450 | 3.9 | 4.21 | 11.03 | 15.2 | 145.2 | 10 |
| 1630 | 3.9 | 4.21 | 12.55 | 16.8 | 163.4 | 11 |
| 1810 | 3.9 | 4.21 | 14.07 | 18.3 | 181.6 | 12 |
| 1990 | 3.9 | 4.21 | 15.60 | 19.8 | 199.8 | 13 |
| 2140 | 4.27 | 4.53 | 13.75 | 18.3 | 214.6 | 12 |
| 2360 | 4.27 | 4.53 | 15.28 | 19.8 | 236.4 | 13 |
| 2580 | 4.27 | 4.53 | 16.80 | 21.3 | 258.3 | 14 |
| 2670 | 4.57 | 4.79 | 15.02 | 19.8 | 268.0 | 13 |
| 2920 | 4.57 | 4.79 | 16.54 | 21.3 | 293.0 | 14 |
| 3170 | 4.57 | 4.79 | 18.07 | 22.9 | 318.0 | 15 |

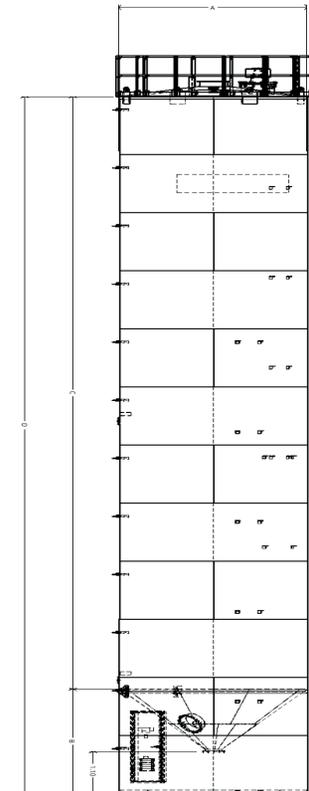